

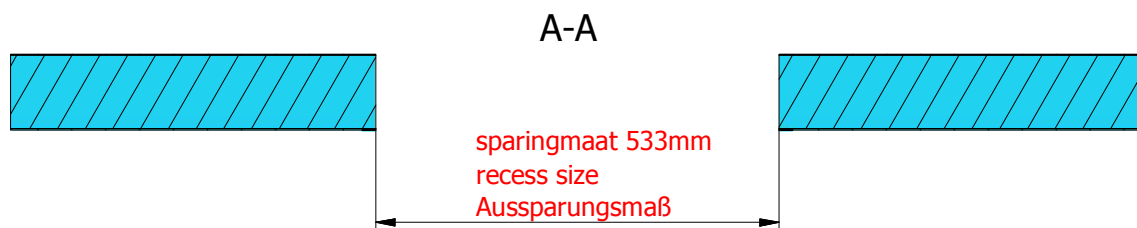
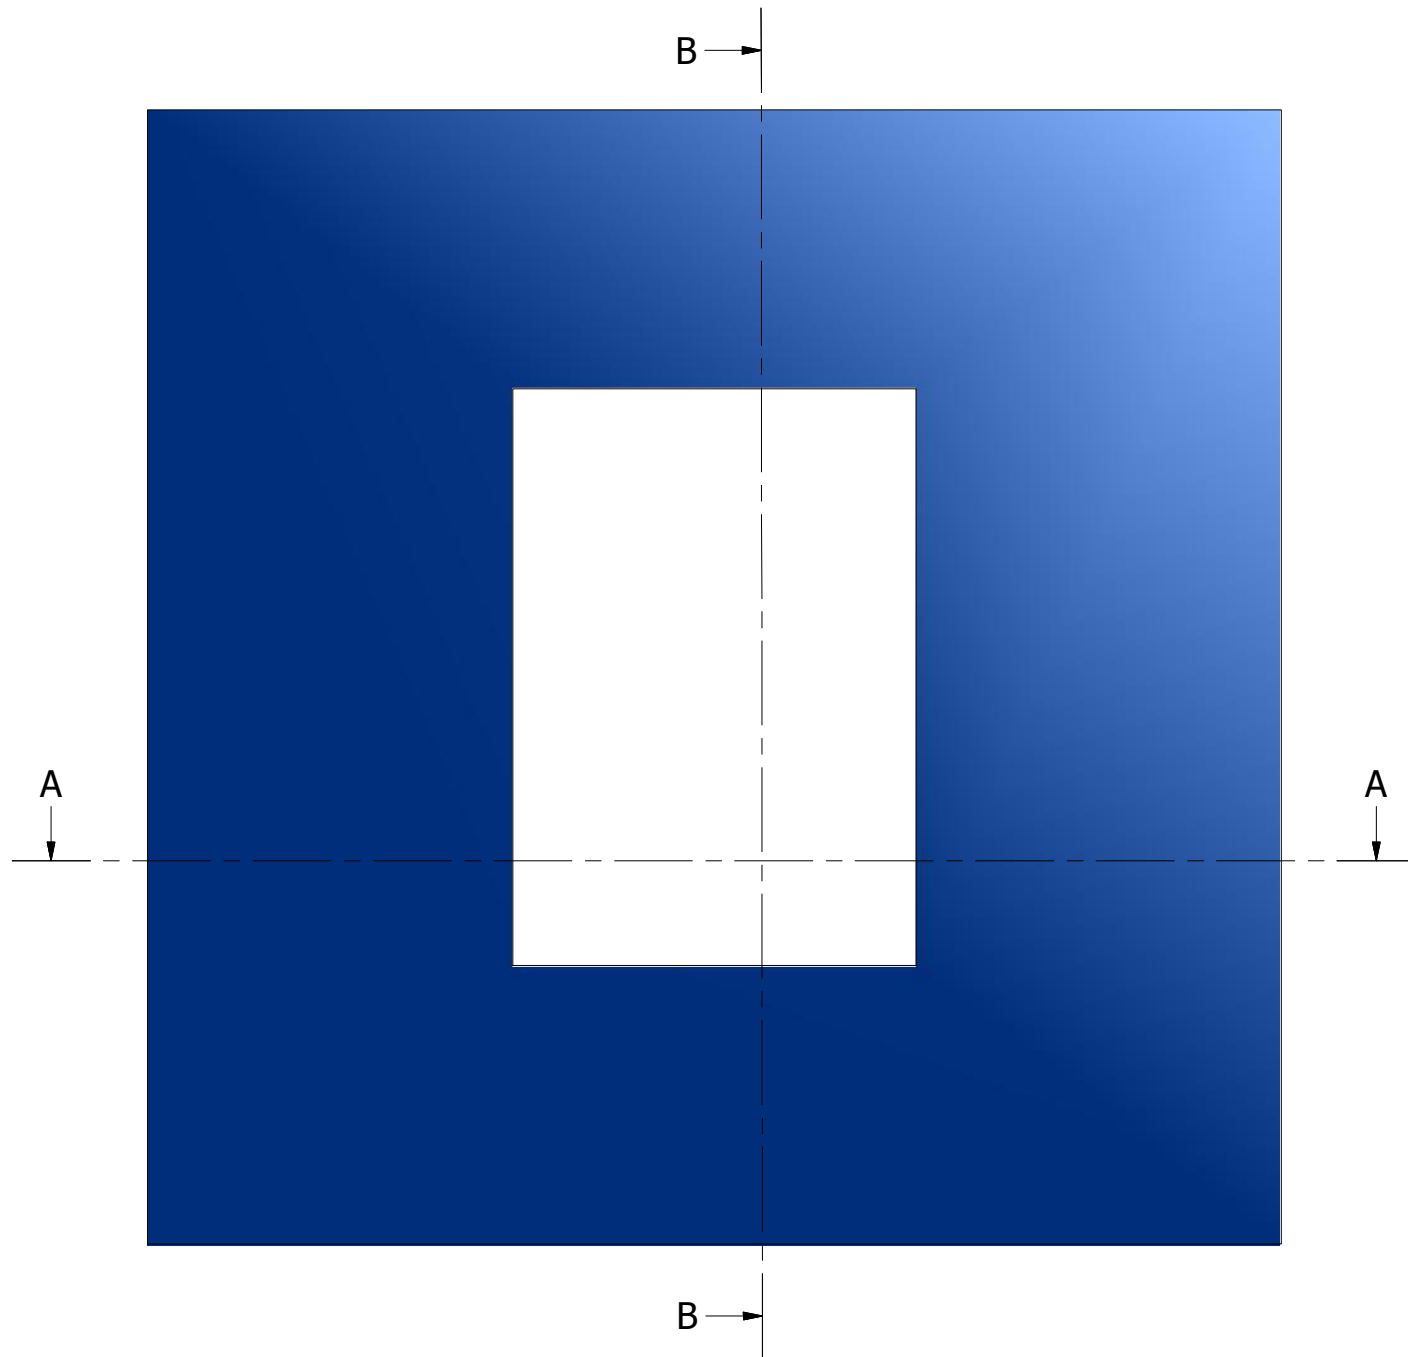
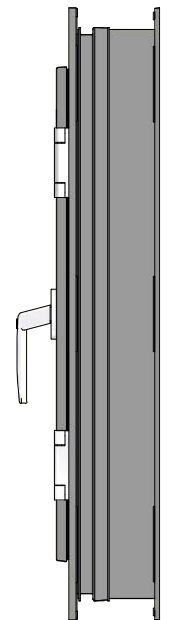
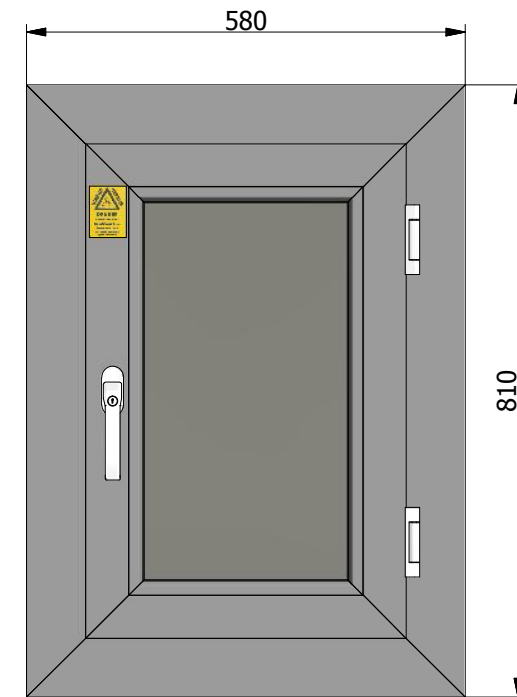


**Controle venster deur/plafond springmaten**  
**CA Control window door/ceiling recess sizes**  
**gasdichtes Fenster Aussparungsmaße Tür/Decke**

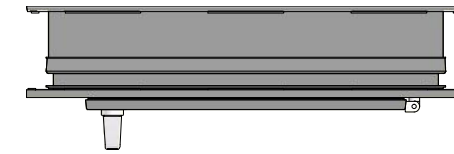

B-B

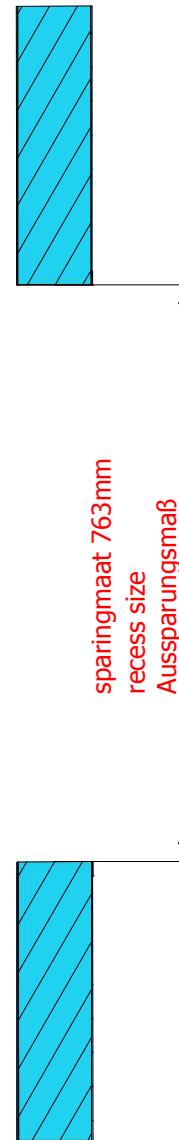

**Belangrijk:**

Het montagevlak dient vlak te zijn, en vrij van uitstekende delen.  
 De sparing in de panelenwand dient recht, vlak en haaks te zijn.

**Important:**

The mounting area should be flat, straight and level.  
 The recess in the panel wall should be perpendicular, flat and square.

**Wichtig:**

Die Montagefläche soll flach sein und ohne hervorstehenden Teilen.  
 Die Aussparung in der Paneelenwand soll lotrecht, flach und waagrecht sein.

Ruwheid NEN 3634	Maattolerantie NEN-ISO-406		Vorm en plaatstol. NEN-ISO-1101
Amerikaanse projectie 	Schaal : Maateenheid: mm	Getekend : AGR Datum : 4-2-2015	Tekeningnummer : GVA-MON-10003
Benaming : inbouw springmaten A			Nummer: 1 Van : 1
			Formaat: A3